


Insulated handle

Contact area between jumper & stud must be  $\geq$  X-sec of jumper

"Nuts" omitted. for clarity

NOT TESTED

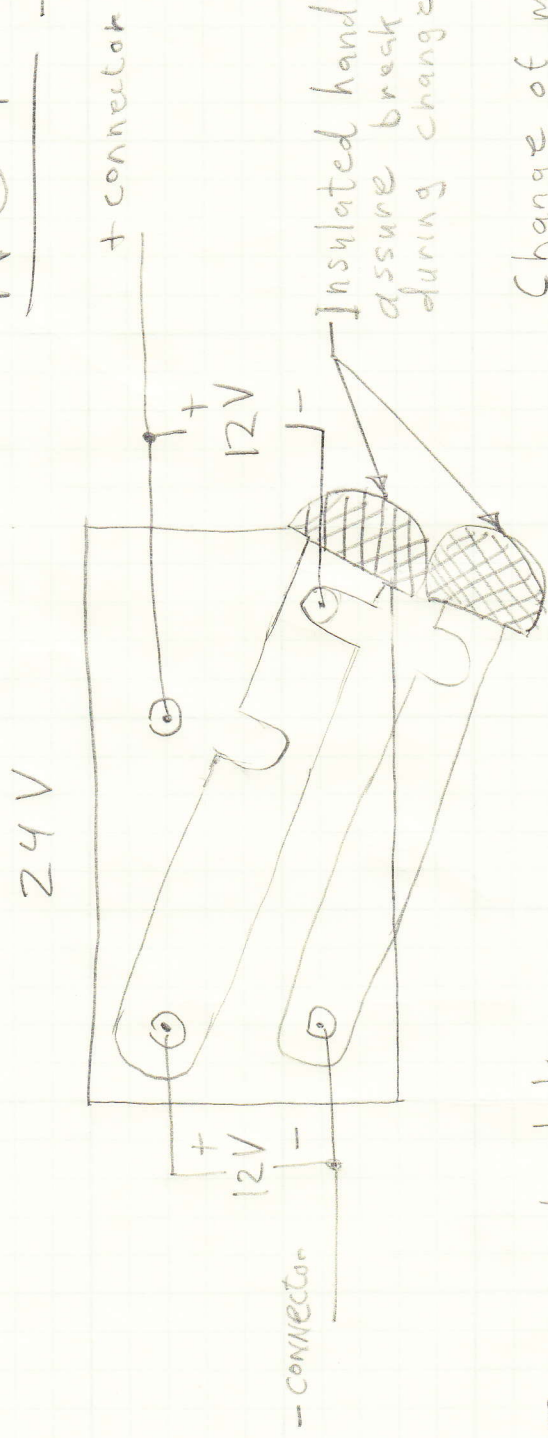

Insulated handles designed to assure break before make during change of mode

Change of mode to be done ONLY in no load condition

Raymond Julian  
10/24/10