


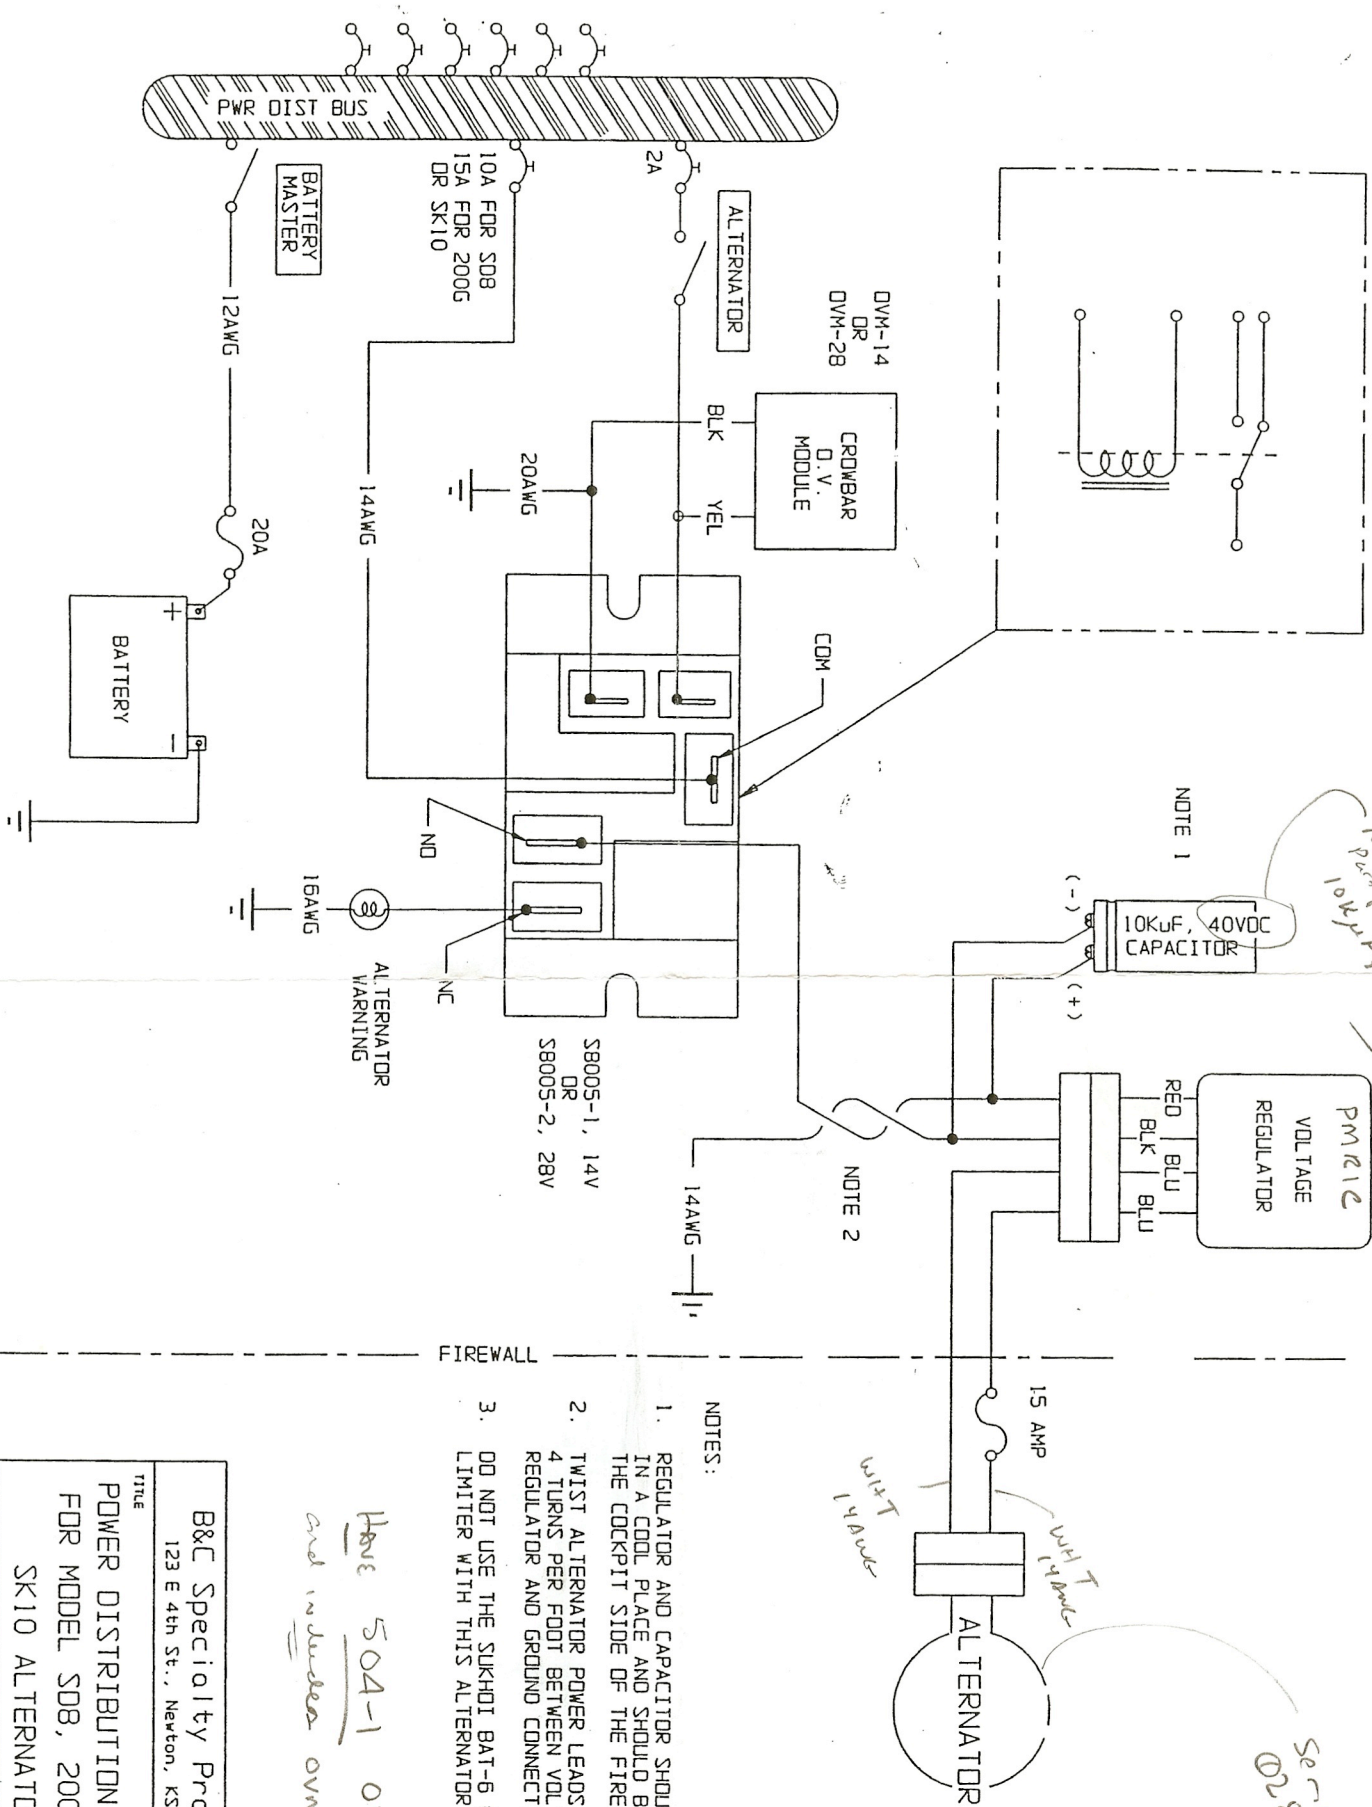

NOTE 1

10K μ F, 40VDC
CAPACITOR

Notes: Board provided 15VDC
10K μ F, 50VDC

NOTE 2

FIREWALL

NOTES:

1. REGULATOR AND CAPACITOR SHOULD BE MOUNTED IN A COOL PLACE AND SHOULD BE MOUNTED ON THE COCKPIT SIDE OF THE FIREWALL.
2. TWIST ALTERNATOR POWER LEADS APPROX 4 TURNS PER FOOT BETWEEN VOLTAGE REGULATOR AND GROUND CONNECTION.
3. DO NOT USE THE SUKHDI BAT-6 CHARGE LIMITER WITH THIS ALTERNATOR SYSTEM.

Have 504-1 OV protection
and include ovm-14 kit

B&C Specialty Products			
123 E 4th St., Newton, KS 67114			
TITLE			
POWER DISTRIBUTION DIAGRAM			
FOR MODEL SDB, 2006 AND			
SK10 ALTERNATORS			
DWG NO	504-500	REV C	DATE 8/22/01
PAGE	1	OF	1

Cornell Dublier
500C103UD50AB2A

Serial No.
0281022