

* Ground power contactor notes

Use a continuous duty contactor


Cole-Hersee 24059 (12v) or 24063 (24v) or equivalent

Typically these are used for cross-tie contactors, avail from B&C specialty products www.banc.biz stock #: S701-1

** OVM: Use OVM-14 or OVM-28 from B&C specialty products

GPU Software features (available in a future software upgrade)

1. GPU connection sense input used to measure voltage and drive annunciator on screen
2. Battery contactor(s) and cross-tie (if installed) are closed when GPU is connected and system is on.
3. Allows climate control to operate without engine running (VP-200 and electric compressor only)
4. Display Unit displays voltage on ground power plug (VP-200 only)

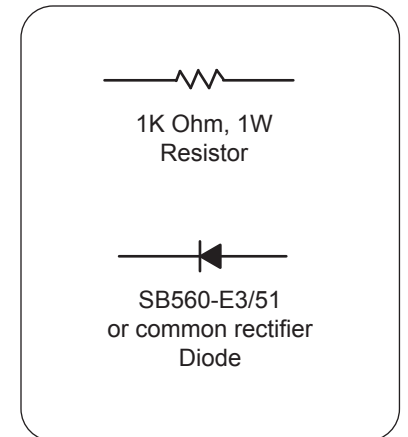

Ground Power Plug installation with VP-100 or VP-200
Integration with single or dual bus systems.
Rev D